

Der Partner in
Ihrer Nähe

Hedemann GmbH
Oldenburger Straße 28
D-26639 Wiesmoor

Tel.: +49 (0) 49 44 / 14 50
Mail: kontakt@hedemann-stapler.de
Web: www.hedemann-stapler.de



Hangcha Europe GmbH

Mariechen-Graulich-Straße 12a,
65439 Flörsheim am Main,
Germany

Administration
Tel: 0049-61453769188
E-mail: admin@hangchaeurope.com

Sales Management
Thomas Dittrich
Mob: 0049-16096548808
E-mail: thomas.dittrich@hangchaeurope.com

Technical Support
Thomas Pannke
Mob: 0049-01759284213
E-mail: thomas.pannke@hangchaeurope.com

www.hangchaeurope.com



Folgen Sie uns auf
Instagram



Folgen Sie uns auf
Facebook



Folgen Sie uns auf
YouTube



"Hangcha Forklift"
App herunterladen



ISO14001:2015



ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

HANGCHA Group Co., LTD behält sich das Recht vor, Änderungen bezgl. Farbe, Spezifikationen, Ausstattung und sonstige Details, dierer Broschüre ohne Vorankündigung vorzunehmen. Fahrzeugfarben können von den Farben in dieser Brochure abweichen.

2025 VERSION 1/COPYRIGHT 2025/07

XC Series 4-W Electric Forklift Truck With Lithium Iron-Phosphate

with capacity of 2,000 to 3,500kg



Hedemann GmbH
Oldenburger Straße 28
D-26639 Wiesmoor

Tel.: +49 (0) 49 44 / 14 50
Mail: kontakt@hedemann-stapler.de
Web: www.hedemann-stapler.de

Der Partner in
Ihrer Nähe

Hedemann GmbH
Oldenburger Straße 28
D-26639 Wiesmoor

Tel.: +49 (0) 49 44 / 14 50
Mail: kontakt@hedemann-stapler.de
Web: www.hedemann-stapler.de



INNOVATIVE LOSUNGEN JETZT NEUE KRAFT



Die neuen elektrischen Elektrostapler der XC-Serie mit einem Bereich von 1,5 bis 3,5 t sind eine Reihe von Produkten mit neuem Fahrgestell, das von HANGCHA auf den Markt gebracht wurde.

Schnelles Laden und Opportunity-Laden gewährleisten die kontinuierliche Verfügbarkeit von Stapler.
Leichtes Design, flexibel, hohe Energieeffizienz, wartungs-frei, lange Lebensdauer.

EVE Akkupack

Batteriekapazität(kW·h)		
Pack1	1.5 - 1.8t	76.8V*230Ah, 17.66kWh
Pack2	1.5 - 1.8t	76.8V*304Ah, 23.34kWh
Pack3	2.0 - 2.5t	76.8V*230Ah, 17.66kWh
Pack4	2.0 - 2.5t	76.8V*304Ah, 23.34kWh
Pack5	2.0 - 2.5t	76.8V*460Ah, 35.32kWh
Pack6	3.0 - 3.5t	76.8V*304Ah, 23.34kWh
Pack7	3.0 - 3.5t	76.8V*460Ah, 35.32kWh
Pack8	3.0 - 3.5t	76.8V*560Ah, 43.00kWh
Pack9	3.0 - 3.5t	76.8V*608Ah, 46.69kWh

6 YEARS
WARRANTY

HANGCHA verwendet Li-Ionen Batterien mit 12.000 Betriebsstunden bzw. sechs Jahren Garantie.



CATL-Akkupacks (optional)

Batteriekapazität(kW·h)		
Pack1	1.5 - 1.8t	80V*228Ah, 18.24Kwh
Pack2	1.5 - 1.8t	80V*302Ah, 24.16Kwh
Pack3	2.0 - 2.5t	80V*302Ah, 24.16Kwh
Pack4	2.0 - 2.5t	80V*456Ah, 36.48Kwh
Pack5	3.0 - 3.5t	80V*456Ah, 36.48Kwh
Pack6	3.0 - 3.5t	80V*604Ah, 48.32Kwh

Ausgezeichnet Ergonomisches Design

- / Der Stapler hat einen großen Betriebsraum, der mehr als 50% größer ist als der herkömmliche Elektro-Stapler.
- / Das Display mit Einstellungsmöglichkeiten in der Fahrerkabine befindet sich über dem Kopf und ist sichtbar, wenn der Fahrer den Kopf hebt, und die Funktionstasten können leicht gedrückt werden.
- / Optional ist das Display mit Touch Screen erhältlich. Der Not-Aus-Schalter, Hupe und Finger-Tip-Steuerung (optional) ist in der Armauflage integriert und wird über Can-Bus sehr zuverlässig gesteuert.
- / Das vergrößerte Bremspedal und die entsprechende regenerative Bremsfunktion können die Ermüdung des Fahrers wirksam reduzieren.



Vorteile



Die integrierte Hochfrequenz-MOSFET-Steuerung gewährleistet eine reibungslose und genaue Fahr- und Hubsteuerung und verfügt über eine hervorragende Drehzahlregelungsleistung, eine gute Leistung der auf den Motor abgestimmten elektronischen Steuerung, Funktionen für regeneratives Bremsen, Rückwärtsbremsen und Antirutschen auf Rampen usw. und hohe Sicherheit und Zuverlässigkeit.

Die Hinterachse ist mit einem flexiblen Federungssystem ausgestattet (für die Standardkonfiguration und die automatische Verzögerung in Kurven verbessern Sie den Fahrerkomfort).

Ein Wechselstrom-Pumpenmotor mit ultrahoher Leistung wird verwendet. Das System verfügt über einen hohen Wirkungsgrad, vollständige Schutzfunktionen, integrierte Geschwindigkeits- und Temperatursensoren sowie eine erheblich verbesserte Zuverlässigkeit und Lebensdauer.

Der Partner in
Ihrer Nähe

Hedemann GmbH
Oldenburger Straße 28
D-26639 Wiesmoor

Tel.: +49 (0) 49 44 / 14 50
Mail: kontakt@hedemann-stapler.de
Web: www.hedemann-stapler.de



RELIABLE
TRUCKS



Easy operations and maintenance

Internal Components Protected with Fully-sealed Hood, controllers, motors electrical components, etc. are sealed from dust and water.



The hood can be opened at a large angle facilitating the maintenance.



IPX4 water resistance rating, suitable for outdoor operation



FIMS

FLEET INTELLIGENT
MANAGEMENT SYSTEM

MOBILE SOLUTION
PROVIDING A MOBILE
APPLICATION



KEEP AN EYE ON EVERYTHING

Hangcha FIMS is a system that provides you with real-time information about forklift truck and driver. Whether you have dozens or hundreds of forklift trucks across multiple sites, you can get access to collecting, monitoring and evaluating all the fleet data at anytime and anywhere.

» Features

- ▶ Access Control
- ▶ GPS Tracking
- ▶ Remote Monitoring
- ▶ Maintenance Reminder
- ▶ Vehicle Management
- ▶ Vibration Monitoring
- ▶ Pre-shift Check (Optional)
- ▶ Shift Management (Optional)
- ▶ OpenAPI (Optional)

Der Partner in
Ihrer Nähe

Hedemann GmbH
Oldenburger Straße 28
D-26639 Wiesmoor

Tel.: +49 (0) 49 44 / 14 50
Mail: kontakt@hedemann-stapler.de
Web: www.hedemann-stapler.de



Three horn buttons are provided, which are respectively on the driver's steering wheel, thumb switch equipped armrest (optional) and reverse armrest (optional), for alerting and protecting the surrounding people.

Main Accessories

The main electrical components such as the controller, contactor, power plug, emergency cut-off switch, dashboard, accelerator, are all products of well-known world brands.

The emergency cut-off switch equipped for the standard configuration complies with EU regulations.

The truck has passed the CE certification.



Safety

The optional OPS system can disable the lowering when the driver leaves the seat and enable high safety.

The standard configuration provides soft landing system. In addition, an optional lift buffering system is provided to protect the goods from falling and damaging the ground.

The handbrake can be optionally equipped with an alarm buzzer to prompt the driver to pull up the handbrake before leaving the truck.



A PIN code should be provided before entering the system. 99 sets of PIN codes are available for the administrator. The truck is highly secured and irrelevant personnel cannot start the truck.



Comfort

Owing to the low center of gravity and good stability, the driver feels comfortable during turning.

The ergonomically designed adjustable steering wheel makes the driver feel good. The seat can be adjusted back and forth by 210mm. The operator can choose the best driving position.

New designed mast increases the wide view by 15%.

With friendly human-computer interfaces, the 4.33" True Color Screen instruments have good visibility and clear readings.

Silence, no pollution, energy saving and other advantages meet the environmental protection requirements.



Grammer fingertip (Optional)

Options

- / Lithium packs that can be replaced quickly
- / Pin code or card
- / Super elastic tyre
- / Marked solid tyre
- / Left and right rear view mirrors
- / Backup camera
- / Front/rear blue lights
- / Rear working lights
- / Charger
- / Reverse armrest
- / Hood with a key lock
- / OPS system
- / Lift buffering system
- / Multi way valves
- / Integrated fingertip control system
- / Widened / heightened load backrest
- / Widened fork carriage
- / Other length forks
- / Full free duplex mast
- / Full free triplex mast
- / Sideshifter
- / Other attachments
- / Grammer MSG531 suspension seat
- / Automatic deceleration at turns
- / FIMS(Fleet intelligent management system)

Standard specification

- / Lithium packs with low temperature electric heating systems
- / High-power AC drive motor
- / High-power AC pump motor
- / Low noise gear pump
- / Multi-function color screen instrument cluster
- / Large integral rubber pedal pad
- / LED combination headlights, LED rear combination taillights
- / Stamped iron hood
- / Soft landing system
- / SPE power selection
- / Charging muzzle meeting national standards
- / Electronic cooling fan
- / Emergency cut-off switch
- / Reversing buzzer
- / Traction pin
- / Folder
- / Load sensing steering system
- / Duplex mast
- / Tilt cylinder jacket



Der Partner in
Ihrer Nähe

Hedemann GmbH
Oldenburger Straße 28
D-26639 Wiesmoor

Tel.: +49 (0) 49 44 / 14 50
Mail: kontakt@hedemann-stapler.de
Web: www.hedemann-stapler.de



2.0~2.5t XC series mast specification

Type	Model	Lifting height	Lowered overall height	Overall height		Free lifting height		Tilting range		Capacity (Mast vertical to ground) Load center@500mm			
				Without backrest	With backrest	Without backrest	With backrest	FWD	BWD	Single Tire		Double Tire	
										2.0t	2.5t	2.0t	2.5t
		mm	mm	mm	mm	mm	mm	(°)	(°)	kg	kg	kg	kg
Duplex wide view mast	XPD25M200	2000	1501	2626	3046	140	140	6	6	2000	2500	2000	2500
	XPD25M250	2500	1751	3126	3546	140	140	6	12	2000	2500	2000	2500
	XPD25M270	2700	1851	3326	3746	140	140	6	12	2000	2500	2000	2500
	XPD25M300	3000	2001	3626	4046	140	140	6	12	2000	2500	2000	2500
	XPD25M330	3300	2151	3926	4346	140	140	6	12	2000	2500	2000	2500
	XPD25M350	3500	2251	4126	4546	140	140	6	12	2000	2500	2000	2500
	XPD25M360	3600	2351	4226	4646	140	140	6	12	2000	2500	2000	2500
	XPD25M370	3700	2401	4326	4746	140	140	6	12	2000	2500	2000	2500
	XPD25M400	4000	2601	4626	5046	140	140	6	12	2000	2500	2000	2500
	XPD25M430	4300	2751	4926	5346	140	140	6	6	2000	2500	2000	2500
	XPD25M450	4500	2851	5126	5546	140	140	6	6	2000	2450	2000	2500
	XPD25M470	4700	2951	5326	5746	140	140	6	6	1950	2350	2000	2450
	XPD25M480	4800	3001	5426	5846	140	140	6	6	1950	2350	2000	2450
	XPD25M500	5000	3101	5626	6046	140	140	6	6	1850	2300	1950	2350
	XPD25M550	5500	3351	6126	6546	140	140	3	6	1750	2150	1900	2200
	XPD25M600	6000	3601	6626	7046	140	140	3	6	1550	1900	1800	2000
Duplex full-free mast	XPD25U200	2000	1516	2749	3046	842	470	6	6	2000	2500	2000	2500
	XPD25U250	2500	1766	3173.5	3546	1092	720	6	12	2000	2500	2000	2500
	XPD25U270	2700	1866	3373.5	3746	1192	820	6	12	2000	2500	2000	2500
	XPD25U300	3000	2016	3673.5	4046	1342	970	6	12	2000	2500	2000	2500
	XPD25U330	3300	2166	3973.5	4346	1492	1120	6	12	2000	2500	2000	2500
	XPD25U350	3500	2266	4173.5	4546	1592	1220	6	12	2000	2500	2000	2500
	XPD25U360	3600	2316	4273.5	4646	1642	1270	6	12	2000	2500	2000	2500
	XPD25U370	3700	2366	4373.5	4746	1692	1320	6	12	2000	2500	2000	2500
Triplex full-free mast	XPD25N400	4000	1966	4670.5	5046	1195	920	6	6	2000	2500	2000	2500
	XPD25N430	4300	2066	4970.5	5346	1295	1020	6	6	2000	2450	2000	2500
	XPD25N450	4500	2116	5170.5	5546	1345	1070	6	6	2000	2350	2000	2450
	XPD25N470	4700	2216	5370.5	5746	1445	1170	6	6	1950	2250	2000	2350
	XPD25N480	4800	2266	5470.5	5846	1495	1220	6	6	1950	2250	2000	2350
	XPD25N500	5000	2366	5670.5	6046	1595	1320	6	6	1850	2100	1950	2250
	XPD25N550	5500	2566	6170.5	6546	1795	1520	3	6	1750	2050	1900	2100
	XPD25N600	6000	2816	6670.5	7046	2045	1770	3	6	1550	1850	1800	1950
	XPD25N650	6500	3016	7170.5	7546	2245	1970	3	6	/	/	1550	1800
	XPD25N700	7000	3266	7766	8046	2695	2220	3	6	/	/	1150	1450

With sideshifter minus 200kg,with integral sideshifter minus 150kg.

3.0~3.5t XC series mast specification

Type	Model	Lifting height	Lowered overall height	Overall height		Free lifting height		Tilting range		Capacity (Mast vertical to ground) Load center@500mm			
				Without backrest	With backrest	Without backrest	With backrest	FWD	BWD	Single Tire		Double Tire	
										3.0t	3.5t	3.0t	3.5t
		mm	mm	mm	mm	mm	mm	(°)	(°)	kg	kg	kg	kg
Duplex wide view mast	XPD35M200	2000	1651	2784	3142	145/150	145/150	6	6	3000	3500	3000	3500
	XPD35M250	2500	1901	3284	3642	145/150	145/150	6	12	3000	3500	3000	3500
	XPD35M270	2700	2001	3484	3842	145/150	145/150	6	12	3000	3500	3000	3500
	XPD35M300	3000	2151	3784	4142	145/150	145/150	6	12	3000	3500	3000	3500
	XPD35M330	3300	2301	4084	4442	145/150	145/150	6	12	3000	3500	3000	3500
	XPD35M360	3600	2451	4384	4742	145/150	145/150	6	12	3000	3500	3000	3500
	XPD35M400	4000	2751	4784	5142	145/150	145/150	6	12	3000	3500	3000	3500
	XPD35M430	4300	2901	5084	5442	145/150	145/150	6	6	3000	3400	3000	3500
	XPD35M450	4500	3001	5284	5642	145/150	145/150	6	6	3000	3300	3000	3400
	XPD35M480	4800	3151	5584	5942	145/150	145/150	6	6	2950	3200	3000	3300
	XPD35M500	5000	3251	5784	6142	145/150	145/150	6	6	2850	3100	2900	3200
	XPD35M550	5500	3501	6284	6642	145/150	145/150	3	6	2670	3000	2750	3100
	XPD35M600	6000	3751	6784	7142	145/150	145/150	3	6	2350	2650	2500	2800
Duplex full-free mast	XPD35U250	2500	1916	3313	3642	1088	759	6	12	3000	3500	3000	3500
	XPD35U270	2700	2016	3513	3842	1188	859	6	12	3000	3500	3000	3500
	XPD35U300	3000	2166	3813	4142	1338	1009	6	12	3000	3500	3000	3500
	XPD35U330	3300	2316	4113	4442	1488	1159	6	12	3000	3500	3000	3500
	XPD35U360	3600	2466	4413	4742	1638	1309	6	12	3000	3500	3000	3500
	XPD35U400	4000	2716	4813	5142	1888	1559	6	12	3000	3500	3000	3500
Triplex full-free mast	XPD35N400	4000	2051	4827	5142	1224	906	6	6	3000	3400	3000	3500
	XPD35N430	4300	2151	5127	5442	1324	1006	6	6	3000	3300	3000	3400
	XPD35N450	4500	2201	5327	5642	1374	1056	6	6	3000	3200	3000	3300
	XPD35N470	4700	2301	5527	5842	1474	1156	6	6	2900	3100	2950	3200
	XPD35N480	4800	2351	5627	5942	1524	1206	6	6	2900	3100	2950	3200
	XPD35N500	5000	2451	5827	6142	1624	1306	6	6	2850	3050	2900	3150
	XPD35N550	5500	2651	6327	6642	1824	1506	3	6	2670	3000	2750	3100
	XPD35N600	6000	2901	6827	7142	2074	1756	3	6	2350	2650	2500	2800
	XPD35N650	6500	3151	7327	7642	2324	2006	3	6	/	/	2200	2400
	XPD35N700	7000	3401	7901	8142	2500	2256	3	6	/	/	1850	2050

With sideshifter minus 200kg,with integral sideshifter minus 150kg.

Der Partner in
Ihrer Nähe



Hedemann GmbH
Oldenburger Straße 28
D-26639 Wiesmoor

Tel.: +49 (0) 49 44 / 14 50
Mail: kontakt@hedemann-stapler.de
Web: www.hedemann-stapler.de



XC Series Electric Forklift

Distinguishing mark	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.			
	1.2	Manufacturers type designation		CPD20-XD6-SI21*	CPD25-XD6-SI21*	CPD30-XD6-SI21*	CPD35-XD6-SI21*
	1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas		Electric	Electric	Electric	Electric
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Seated	Seated	Seated	Seated
	1.5	Load capacity/rated load	Q (kg)	2000	2500	3000	3500
	1.6	Load centre distance	c (mm)	500	500	500	500
	1.7	Load distance, centre of drive axle to fork	x (mm)	444	444	477	482
	1.8	Wheelbase	y (mm)	1520	1520	1650	1650
Weight	2.1	Service Weight	kg	3620	3920	4740	5080
	2.2	Axle loading, laden front/rear	kg	5040/680	5820/700	6745/1095	7800/880
	2.3	Axle loading, unladen front/rear	kg	1620/2000	1670/2250	2010/2730	2100/2980
Tyres, chassis	3.1	Tyres: solid rubber, super elastic, pneumatic, polyurethane		Pneumatic	Pneumatic	Pneumatic	Super elastic
	3.2	Tyre size, front		23×9-10	23×9-10	23×9-10	23×10-12
	3.3	Tyre size, rear		18×7-8	18×7-8	18×7-8	200/50-10
	3.4	Wheels, number front rear (x = driven wheels)		2x/2	2x/2	2x/2	2x/2
	3.5	Tread, front	b10 (mm)	1068	1068	1068	1068
	3.6	Tread, rear	b11 (mm)	960	960	960	960
Dimensions	4.1	Tilt of mast/fork carriage forward/backward	α/β(°)	6/12	6/12	6/12	6/12
	4.2	Height, mast lowered	h1 (mm)	2001	2001	2151	2151
	4.3	Free lift	h2 (mm)	140	140	140	145
	4.4	Lift	h3 (mm)	3000	3000	3000	3000
	4.5	Height, mast extended	h4 (mm)	4040	4040	4135	4135
	4.7	Height of overhead guard STD. (Cabin)	h6 (mm)	2100(2180)	2100(2180)	2100(2180)	2100(2180)
	4.8	Seat height/stand height	h7 (mm)	1120	1120	1120	1120
	4.9	Coupling height	h10 (mm)	430	430	430	430
	4.10	Overall length	l1 (mm)	3370	3370	3550	3550
	4.11	Length to face of forks	l2 (mm)	2300	2300	2480	2480
	4.12	Overall width	b1 (mm)	1252	1252	1252	1298
	4.13	Fork dimensions	s/e/l (mm)	40/122/1070	40/122/1070	45/122/1070	50/122/1070
	4.14	Fork carriage DIN 15 173 --- ISO 2328, class/type A,B		ISO2328 2A	ISO2328 2A	ISO2328 3A	ISO2328 3A
	4.15	Fork-carriage width	b3 (mm)	1038	1038	1100	1100
	4.16	Distance between fork-arms	b5 (mm)	290/1100	290/1100	290/1100	290/1100
	4.17	Ground clearance, laden, below mast	m1 (mm)	120	120	120	120
	4.18	Ground clearance, centre of wheelbase	m2 (mm)	115	115	115	115
	4.19	Aisle width for pallets 1000 x 1200 crossways	Ast (mm)	3734	3734	3950	3955
	4.20	Aisle width for pallets 800 x 1200 Lengthways	Ast (mm)	3934	3934	4150	4155
	4.21	Turning radius	Wa (mm)	2090	2090	2270	2270
	4.22	Internal turning radius	b13 (mm)	655	655	730	730
	Performance Data	5.1	Travel speed, laden/unladen	km/h	14/15	14/15	14/15
5.2		Lift speed, laden/unladen	m/s	0.350/0.450	0.3500/0.450	0.330/0.430	0.330/0.430
5.3		Lowering speed, laden/unladen	m/s	0.450/0.420	0.470/0.420	0.450/0.420	0.470/0.420
5.4		Drawbar pull, laden/unladen	N	13000/14000	17000/18000	20000/21000	20500/21000
5.5		Max. Drawbar pull, laden/unladen	N	15000	19000	20000	20000
5.6		Gradeability, laden/unladen	%	14/15	14/15	14/15	14/15
5.7		Service brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic
5.8		Parking brake		Mechanical	Mechanical	Mechanical	Mechanical
Electric- engine	6.1	Drive motor rating S2 60 min	kW	11AC	11AC	11AC	11AC
	6.2	Lift motor rating at S3 15%	kW	21AC	21AC	21AC	21AC
	6.3	Battery voltage, Std.	V/Ah	80/230	80/230	80/304	80/304
	6.4	Standard Weight of lithium iron phosphate battery	kg	200	200	240	240
	6.5	Min. battery weight	kg	180	180	230	230
		Max. battery weight	kg	280	280	380	380
	6.6	Type of drive control		MOSFET/AC	MOSFET/AC	MOSFET/AC	MOSFET/AC
	6.7	Manufacturer		INMOTION	INMOTION	INMOTION	INMOTION
6.8	Control Model		ACS80M-35P+ ACS80M-23P	ACS80M-35P+ ACS80M-23P	ACS80L-440C-35P+ ACS80M-23P	ACS80L-440C-35P+ ACS80M-23P	
Addition data	7.1	Operating pressure for attachments	bar	175	175	175	175
	7.2	Oil volume for attachments	l/min	65	65	65	65
	7.3	Hydraulic Tank - capacity (drain & refill)	liter	28	28	28	28
	7.4	Sound level at the driver´s ear according to EN / DIN 12 053	dB (A)	75	75	75	75
	7.5	Towing coupling, type DIN		φ25 Pin	φ25 Pin	φ25 Pin	φ25 Pin

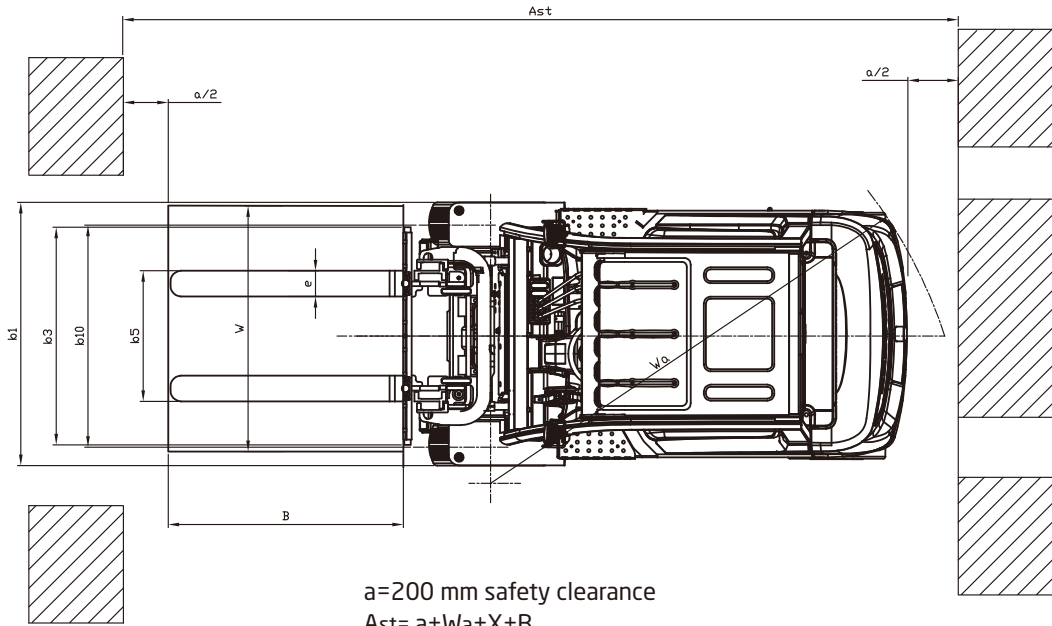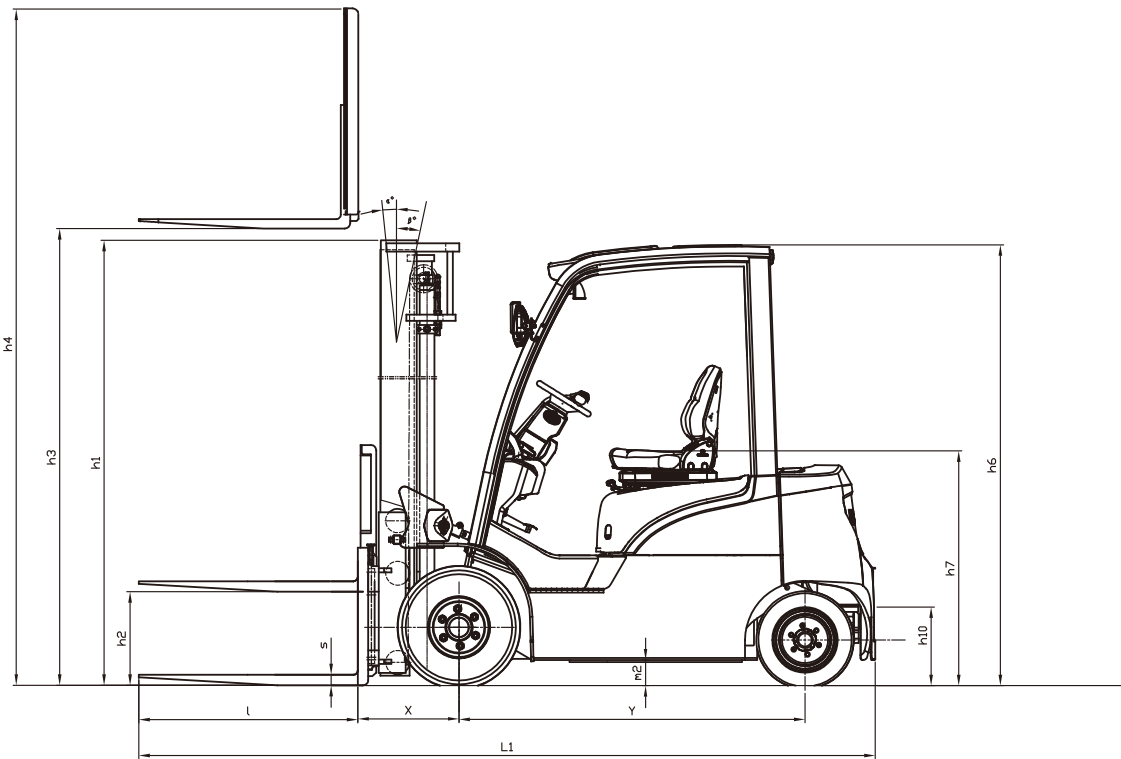

a=200 mm safety clearance
Ast= a+Wa+X+B

3M duplex mast

